


DC FAIL SAFE BRAKE 'SLDC' SERIES

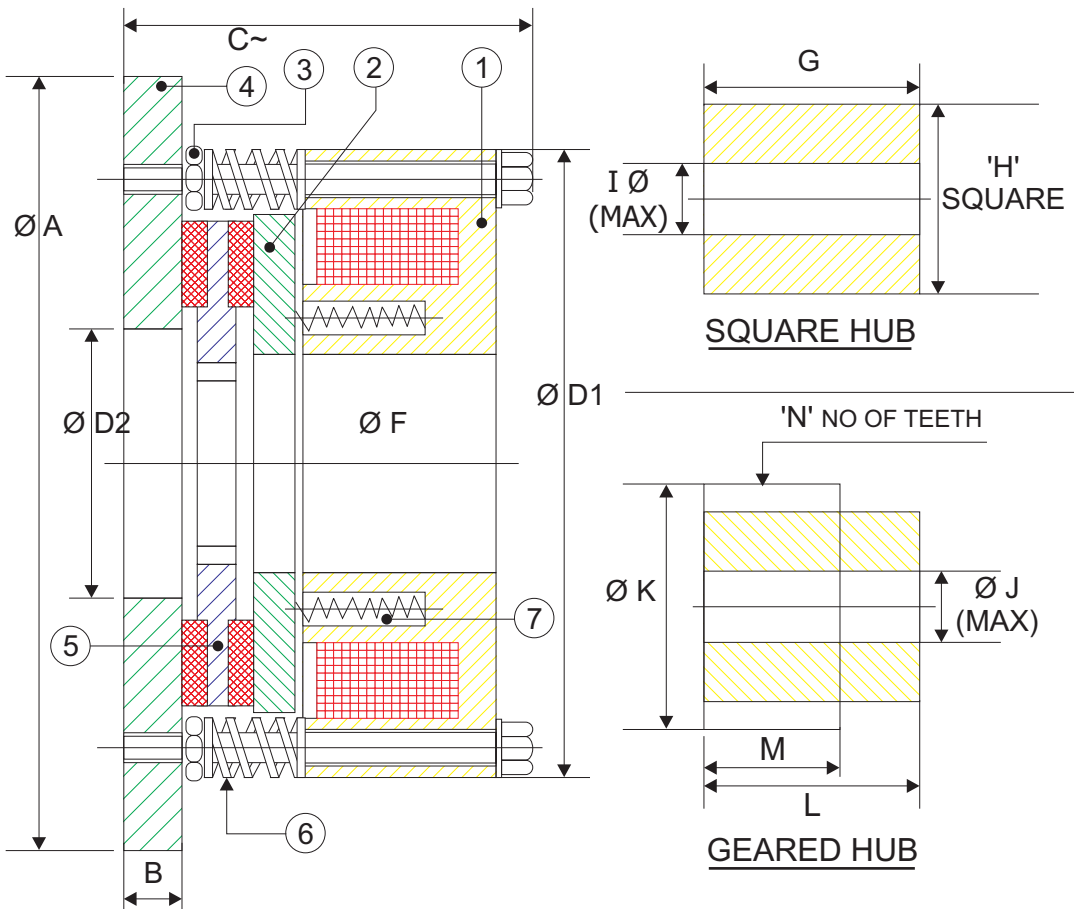

- PART LIST :**
- ① BRAKE BODY
 - ② ARMATURE PLATE
 - ③ LOCKING NUT
 - ④ MOUNTING PLATE
 - ⑤ FRICTION DISC
 - ⑥ GAP ADJUSTING SPRING
 - ⑦ COMPRESSION SPRING

MODEL 'SLDC'	TECH DATA		DIMENSIONS						GEARED HUB				
	WATTS COLD 24V.DC	TORQUE KG.M.	Ø A	B	C~	Ø D1	Ø D2	Ø F	Ø J MAX	Ø K	L	M MIN	'N' NO OF TEETH
80	22	0.25	105	9	53	80	40	33	14	30	25	15	18
100	25	0.6	125	12	60	100	40	35	14	30	25	15	18
110	35	1.0	140	14	75	110	45	45	18	36	28	18	22
130	40	2.0	160	14	82	130	65	47	24	43	30	25	27
150	75	3.0	185	14	80	150	65	65	28	52	36	26	24
170	70	5.0	205	14	80	170	95	65	28	52	48	38	24
195	60	8.0	250	14	95	195	100	100	50	72.4	60	35	27
230	60	14.0	300	20	95	230	110	110	50	72.4	60	35	27
265	125	25.0	350	20	95	265	140	120	65	94.9	75	45	36

- NOTE :**
- 1) DRIVING HUB IS PROVIDED WITH APPROXIMATE LENGTH AND PILOT BORE
 - 2) STD. VOLTAGE 24V.DC. (OTHER VOLTAGE 42,90,190 AVAILABLE ON REQUEST)
 - 3) ILLUSTRATION AND SPECIFICATION ARE NOT BINDING IN DETAILS WE RESERVE OUR RIGHTS TO CHANGE ANY DIMENSIONS AND TECHNICAL DETAILS DUE TO CONSTANT DEVELOPMENT FOR COMPACTNES.
 - 4) BRAKE IS SUPPLIED WITH STD. MOUNTING PLATE IF DETAILS ARE CONFIRMED WITH ORDER PROPER MOUNTING PLATE WILL BE SUPPLIED AT EXTRA COST.