


'SAKAR' SERIES WITHOUT BEARING MOUNTED CLUTCH

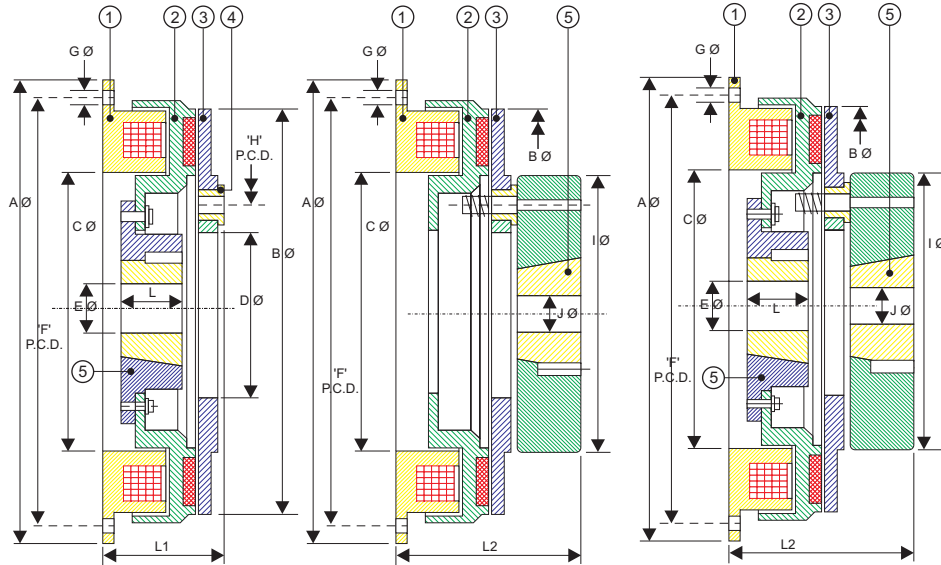

EXTERNAL MOUNTING CLUTCH
TAPER LOCK AT ROTOR SIDE

DRG. NO. SFC/031/99

EXTERNAL MOUNTED CLUTCH
TAPER LOCK AT ARMATURE SIDE

DRG. NO. SFC/032/99

EXTERNAL MOUNTING CLUTCH TAPER
LOCK AT ROTOR AND ARMATURE SIDE

DRG. NO. SFC/033/99

MODEL SAKAR	WATTS AT 90V DC MAX	TORQUE KG. M.	A0	B0	C0	D0	E0 MAX	'F' P.C.D.	G0 X NO OFF	'H' P.C.D. X NO OFF	I0	J0 MAX	L	L1	L2
825	40	15	9 3/4	209	125	2 9/16	1 1/4	8 7/8	11 3/32 X 4	3 9/16 X 3	4 5/8	1 5/8	1"	66	104
1000	40	30	11 1/2	255	174	4 1/8	2"	10 5/8	11 3/32 X 8	5 1/4 X 3	6 1/4	2 1/2	1 1/4	66	111
1225	40	60	13 7/8	311	204	4 5/8	2 1/2	13	11 3/32 X 8	5 7/8 X 4	6 7/8	2 3/4	1 3/4	76	152
1525	40	100	16 7/8	380	270	7 3/32	3"	16	11 3/32 X 12	8 1/2 X 4	9 1/2	3"	2"	76	152


PART LIST

- ① MAGNET BODY
- ② ROTOR
- ③ ARMATURE PLATE
- ④ BRASS BUSH
- ⑤ TAPER LOCK

NOTE

ORIGINAL DIMENSIONS ARE IN INCHES WE PROVIDE NEAREST
METRIC DIMENSIONS WHEREVER POSSIBLE

'SAKAR' SERIES WITHOUT BEARING MOUNTED CLUTCH

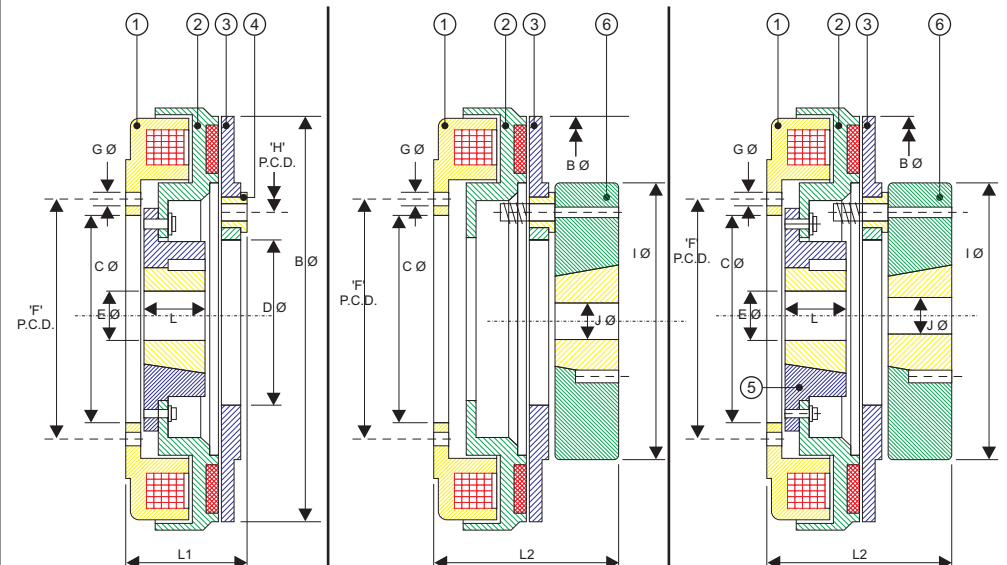

INTERNAL MOUNTING CLUTCH
TAPER LOCK AT ROTOR SIDE

DRG. NO. SFC/034/99

INTERNAL MOUNTED CLUTCH
TAPER LOCK AT ARMATURE SIDE

DRG. NO. SFC/035/99

INTERNAL MOUNTING CLUTCH TAPER
LOCK AT ROTOR AND ARMATURE SIDE

DRG. NO. SFC/036/99

MODEL	WATTS AT 90V DC MAX	TORQUE KG.M.	B0	C0	D0	E0 MAX	'F' P.C.D.	G0 X NO. OFF	'H' P.C.D. X NO. OFF	I0	J0 MAX	L	L1	L2
SAKAR-825	40	15	209	3 1/2	2 9/16	1 1/4	4 1/4	11 3/32 X 6	3 9/16 X 3	4 5/8	1 5/8	1"	66	106
SAKAR-1000	40	30	255	5 3/8	4 1/8	2"	6 1/8	11 3/32 X 6	5 1/4 X 3	6 1/4	2 1/2	1 1/4	66	115
SAKAR-1225	40	60	311	6 3/8	4 5/8	2 1/2	7 1/4	11 3/32 X 6	5 7/8 X 4	6 7/8	2 3/4	1 3/4	76	151
SAKAR-1525	40	100	380	9"	7 3/32	3"	9 3/4	11 3/32 X 12	8 1/2 X 4	9 1/2	3"	2"	76	151

PART LIST

- ① MAGNET BODY
- ② ROTOR
- ③ ARMATURE PLATE
- ④ BRASS BUSH
- ⑤ TAPER LOCK
- ⑥ DRIVING HUB

NOTE :

ORIGINAL DIMENSIONS ARE IN INCHES
WE PROVIDE NEAREST METRIC DIMENSIONS
WHEREVER POSSIBLE