



# CLUTCH AND BRAKE 'P' SERIES

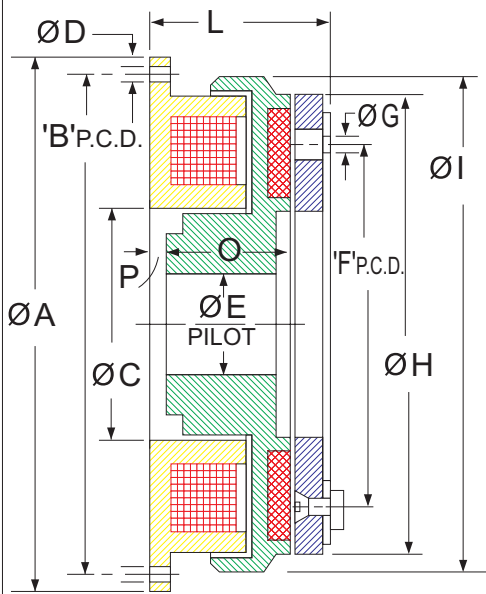


**CLUTCH : C**  
ARMATURE PLATE WITH  
SPRING STEEL : S.S.A.

DRG. NO.: P/STD/011/99

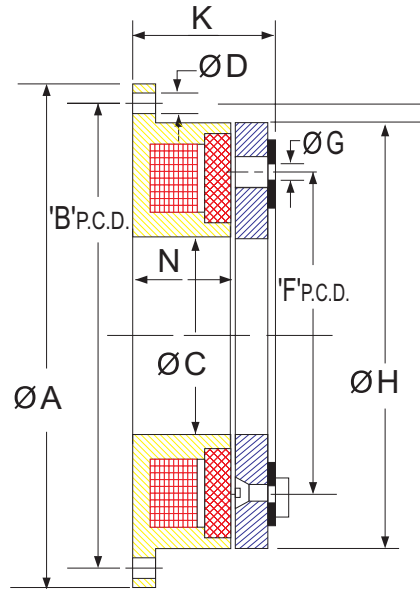

**BRAKE : B**  
ARMATURE PLATE WITH  
SPRING STEEL : S.S.A.

DRG. NO.: P/STD/013/99

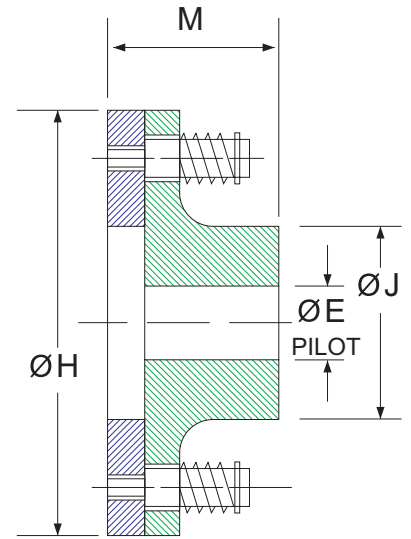

**PIN DRIVE ARMATURE  
PLATE ASSEMBLY P.D.A.  
FOR CLUTCH AND BRAKE**

DRG. NO.: P/STD/013/99

MODEL	TECH. DATA		DIMENSIONS															
	WATTS 24 V.DC.	TORQUE KG. M.	Ø A	B P.C.D.	Ø C	Ø D NO OFF	Ø E MAX	ARMATURE FIXING		Ø H	Ø I	Ø J	K	L	M	N	O	P
							'F' P.C.D.	GØ X NO.										
P-45	8	0.15	60	52	18	4.3 X 3	10	29	4.1 X 2	45	45	17	21	27	18	17	22.5	2
P-63	12	0.5	80	72	35	4.5 X 4	17	46	4.1 X 3	63	68	27	22	28	20	18	22.4	2
P-80	15	1.5	100	90	42	4.5X4	22	60	4.1X3	80	85	32	25	31	25	20	24	3
P-100	20	3.0	125	112	52	6.5X4	30	76	5.1X3	100	107	42	29	36	35	22	27	3.5
P-125	35	5.0	150	137	62	6.5X4	40	95	6.1X3	125	134	49	31	41	40	24	30	4
P-160	45	10.0	190	175	80	9.0X4	50	120	8.2X3	160	170	65	35	47	50	26	34	4
P-200	50	24.0	230	215	100	9.0X4	65	158	10.2X3	200	214	85	46	56	60	30	40	4
P-250	60	35.0	290	270	125	11.0X4	80	210	12.2X4	250	266	105	50	64	70	35	47	5

- NOTE**
- ① ALL CLUTCHES AND BRAKES ARE WORKING ON 24 V DC OTHER DC VOLTAGES ARE AVAILABLE ON REQUEST AT EXTRA COST.
  - ② WE RESERVE OUR RIGHTS TO CHANGE ANY DIMENSIONS AND TECHNICAL DETAILS DUE TO CONSTANT DEVELOPMENTS
  - ③ (i) B DENOTES FOR BRAKE (ii) C DENOTES FOR CLUTCH  
(iii) SSA DENOTES ARMATURE PLATE WITH SPRING STEEL  
(iv) P.D.A. DENOTES ARMATURE PLATE WITH PIN DRIVE ARRANGEMENT.
  - ④ ORDERING DATA EXAMPLE P-125 C.S.S.A. IT MEAN CLUTCH ASSLY ARMATURE PLATE WITH SPRING STEEL PLATE (2) P-100 B..D.A. IT MEAN P-100 BRAKE ASSLY ARMATURE PLATE WITH PIN DRIVE ARRANGEMENT.