



'P' SERIES CLUTCH-BRAKE COMBINATION (OPEN TYPE)

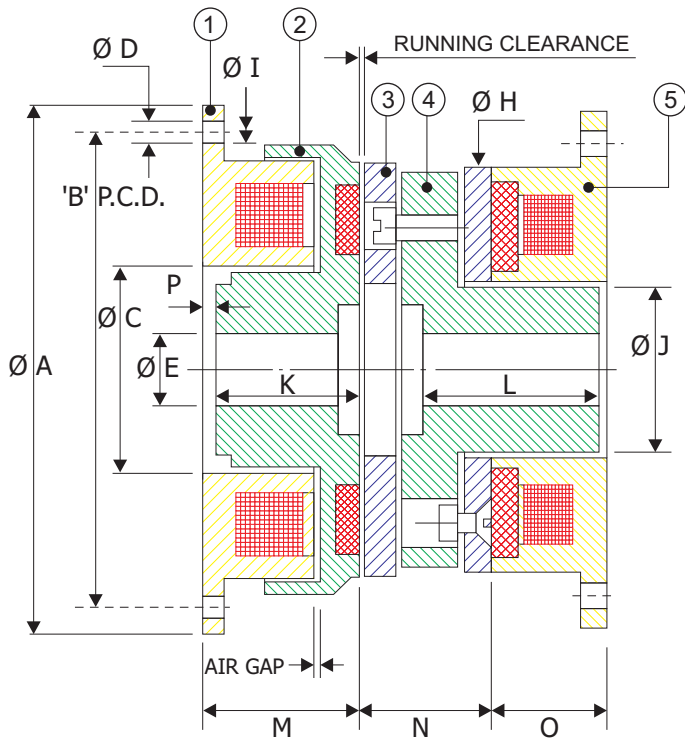

CLUTCH-BRAKE COMBINATION WITH TWO ARMATURE PLATE AND SPIDER

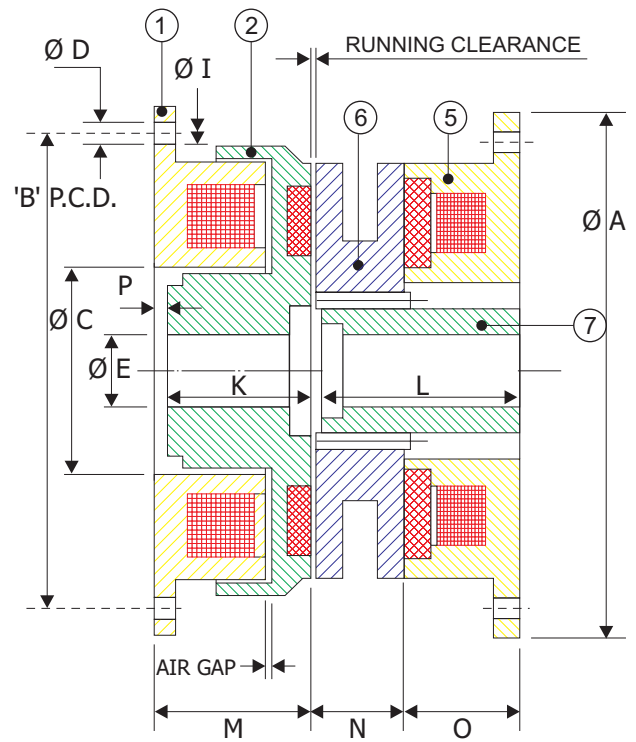

CLUTCH-BRAKE COMBINATION WITH GEARED ARMATURE PLATE AND GEARED HUB

DRG. NO. P/STD/016/99

DRG. NO. P/STD/017/99

MODEL	TECH	DATA	DIMENSIONS														
			WATTS 24V. DC.	TORQUE KG. M.	Ø A	B P.C.D.	Ø C	Ø D NO OFF	Ø E MAX	Ø H	Ø I	Ø J	K	L	M	N	O
P - 45	8	0.15	60	52	18	4.3X3	10	45	45	15	22.5	23	23	16	17	NA	2
P - 63	12	0.5	80	72	35	4.5X4	17	63	68	30	22.5	25	25.2	16	18	8	2
P - 80	15	1.5	100	90	42	4.5X4	22	80	85	40	24	39	28	22	20	13	3
P - 100	20	3.0	125	112	52	6.5X4	30	100	107	40	27	25	30.5	21	22	15	4
P - 125	35	5.0	150	137	62	6.5X4	40	125	134	50	30	40	34	22	24	20	4
P - 160	45	10.0	190	175	80	9.0X4	50	160	170	75	34	51	37.5	28	26	24	4
P - 200	50	24.0	230	215	100	9.0X4	65	200	214	95	40	57	43	45	30	45	4
P - 250	60	35.0	290	270	125	11.0X4	80	250	266	120	47	67	51	45	27	43	7

PART LIST :

- ① CLUTCH BODY
- ② ROTOR
- ③ SPRING STEEL ARMATURE PLATE
- ④ SPIDER
- ⑤ BRAKE BODY
- ⑥ GEARED ARMATURE PLATE
- ⑦ GEARED HUB

NOTES

- Ⓐ STANDARD VOLTAGE 24 VDC OTHER VOLTAGES AVAILABLE ON REQUEST AT EXTRA COST
- Ⓑ B PCD AND DØX NO. OFF WILL REMAINS SAME FOR BRAKE BODY ALSO
- Ⓒ PART NO 2 ROTOR, PART NO 4 SPIDER WILL BE SUPPLIED WITH PILOT DRILL
- Ⓓ ALL DIMENSIONS ARE IN METRIC SYSTEM
- Ⓔ WE RESERVE OUR RIGHTS TO CHANGE ANY DIMENSIONS TECHNICAL DETAILS DUE TO CONSTANT DEVELOPMENT