


VISTAR SERIES CLUTCH-BRAKE COMBINATION

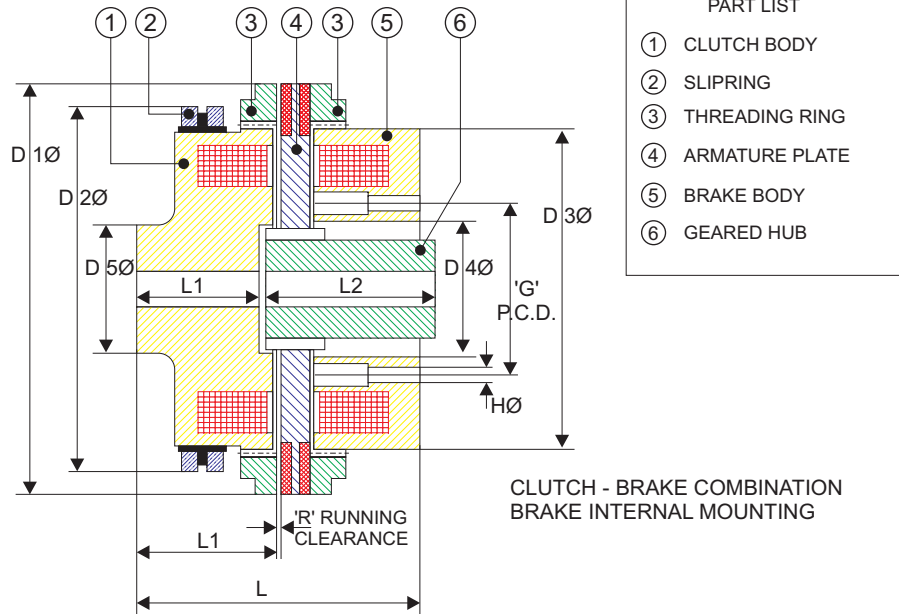


MODEL VISTAR	TORQUE KG.M	WATTS	D10	D20	D30	D40	D50	'G' P.C.D.	H0X NO OFF	L	L1	L2	L3	R
155	3	25	155	133	115	48	50	58	65X5	112	52	65	57	0.5
200	7	35	200	170	152	64	60	80	85X5	125	60	70	65	0.5
230	15	45	230	193	175	75	60	92	85X6	139	68	75	73	1.0
300	20	60	300	227	205	98	75	116	11X5	161	80	75	85	1.0
350	45	85	350	263	245	112	80	138	11X6	183	95	100	100	1.0

NOTE : 1) CLUTCH BODY AND GEARED HUB WILL BE SUPPLIED WITH ROUGH BORE

2) WE RESERVE OUR RIGHTS TO CHANGE ANY DATA AND DIMENSION DUE TO CONSTANT DEVELOPMENT.

VISTAR SERIES CLUTCH-BRAKE COMBINATION

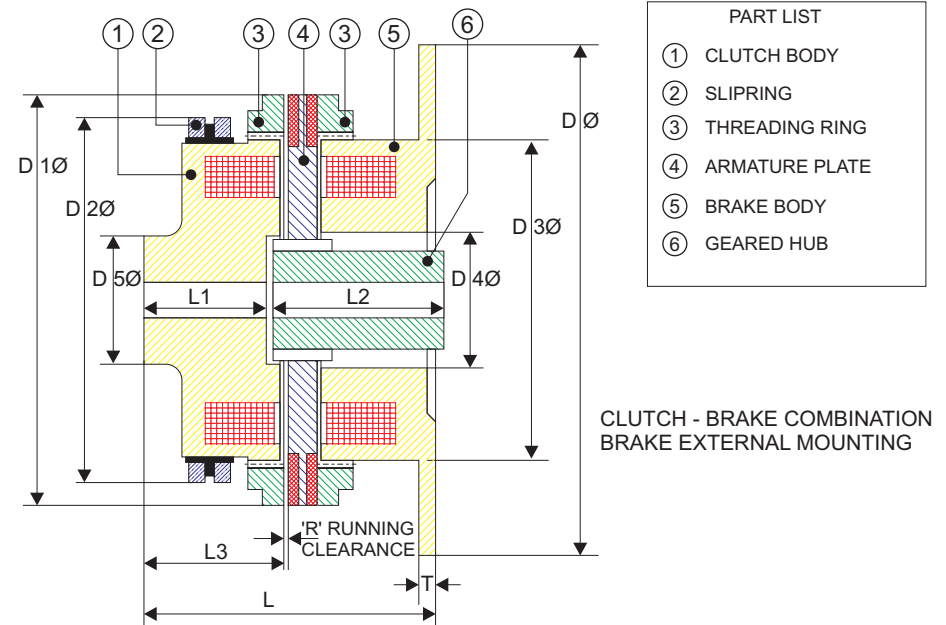

MODEL	TORQUE KG.M	WATTS	D0	D10	D20	D30	D40	D50	L	L1	L2	L3	T	R
VISTAR-05	1	15	100	80	97	80	42	35	106	60	55	60	3	0.5
VISTAR-013	2	20	125	100	115	100	52	40	101	52	55	52	3	0.5
VISTAR-155	3	25	185	155	133	115	48	50	114	52	65	57	6	0.5
VISTAR-200	7	35	230	200	170	152	64	60	131	60	70	65	9	0.5
VISTAR-230	15	45	245	230	193	175	75	60	142	68	60	73	9	1.0
VISTAR-300	20	60	320	300	227	205	98	75	167	80	75	85	10	1.0
VISTAR-350	45	85	385	350	263	245	112	80	187	75	100	100	11	1.0

NOTE : 1) CLUTCH BODY AND GEARED HUB WILL BE SUPPLIED WITH ROUGH BORE
2) FLANGE OF THE BRAKE WILL BE SUPPLIED WITHOUT DRILLING. YOU CAN DRILL THE MOUNTING HOLES CONSIDERING D0 AND D30
3) WE RESERVE OUR RIGHTS TO CHANGE ANY DATA AND DIMENSION DUE TO CONSTANT DEVELOPMENT.