



'VISTAR' SERIES DIRECT DRIVE CLUTCH

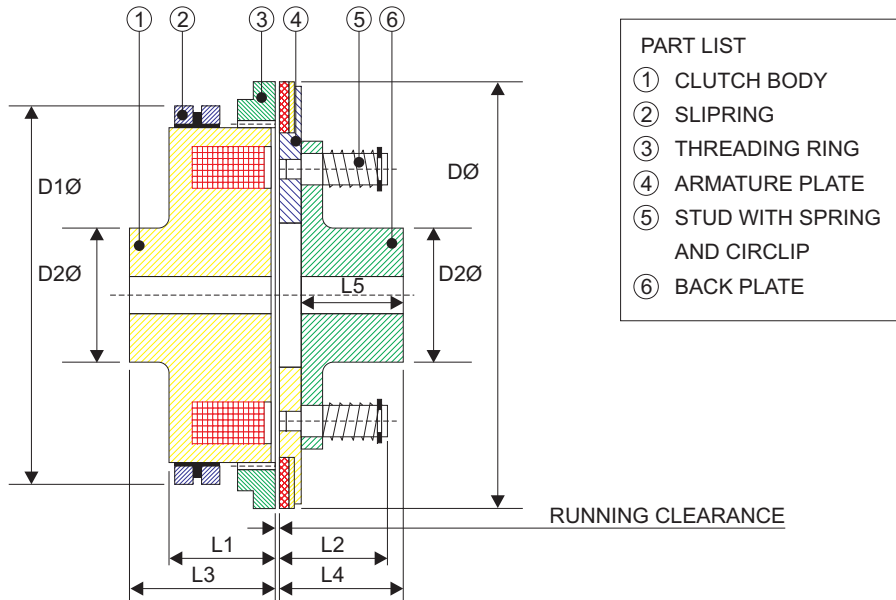

- PART LIST**
- ① CLUTCH BODY
 - ② SLIPRING
 - ③ THREADING RING
 - ④ ARMATURE PLATE
 - ⑤ STUD WITH SPRING AND CIRCLIP
 - ⑥ BACK PLATE

MODEL	TORQUE KG.M.	WATTS AT 24 V. DC.	D Ø	D 1Ø	D 2Ø	L1	L2	L3	L4	L5		
VISTAR-05	1	15	80	97	35	25	33	50	38	30		
VISTAR-013	2	20	100	115	40	25	37	52	39	30		
VISTAR-155	3	25	155	133	50	42	31	57	53	45		
VISTAR-200	7	35	200	170	60	47	37	65	55	46		
VISTAR-230	15	45	230	193	60	50	41	73	73	60		
VISTAR-300	20	60	300	227	75	60	50	85	78	63		
VISTAR-350	45	85	350	263	80	65	63	100	104	87		
VISTAR-365	65	125	365	AS PER DRG. NO 5 A								

NOTE : 1) MAGNET BODY AND BACK PLATE WILL BE SUPPLIED WITH ROUGH BORE IF BORE AND KEY-WAY IS NOT SPECIFIED WITH ORDER.
 2) STANDARD VOLTAGE IS 24 VDC OTHER VOLTAGE IS AVAILABLE.
 3) VISTAR 05 AND VISTAR 013 IS HAVING ONLY ONE SLIPRING AND OTHER TERMINAL IS EARTHED
 4) WE RESERVE OUR RIGHTS TO CHANGE ANY DIMENSIONS DUE TO CONSTANT DEVELOPMENT.

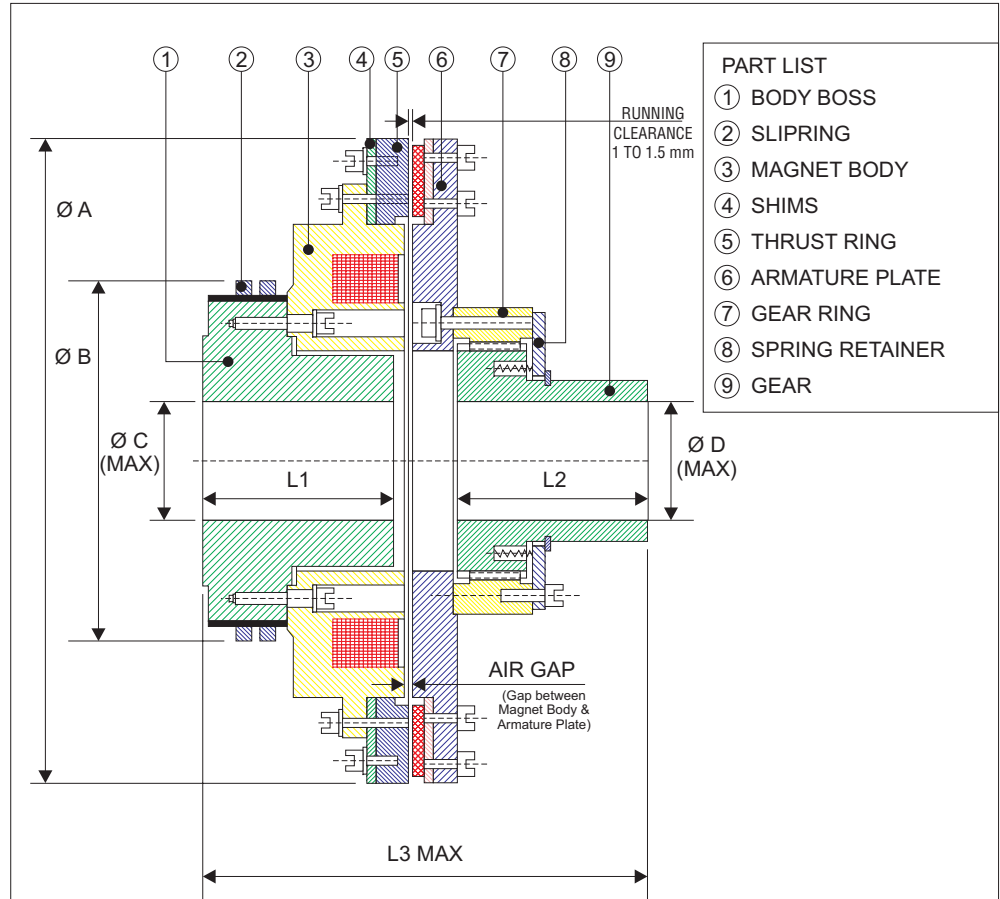

- PART LIST**
- ① BODY BOSS
 - ② SLIPRING
 - ③ MAGNET BODY
 - ④ SHIMS
 - ⑤ THRUST RING
 - ⑥ ARMATURE PLATE
 - ⑦ GEAR RING
 - ⑧ SPRING RETAINER
 - ⑨ GEAR

MODEL	VOLTAGE	WATTS MAX	TORQUE KG.M.	Ø A	Ø B	Ø C MAX	Ø D MAX	L1	L2	L3 MAX	AIR GAP	
											MIN	MAX
VISTAR-365	110	125	65	365	204	70	70	86	86	228	0.3	0.8
VISTAR-420	110	132	100	420	235	80	80	118	118	287	0.3	0.8
VISTAR-480	110	145	160	480	257	90	85	138	138	336	0.5	1.0
VISTAR-545	110	265	250	545	297	100	100	160	160	393	0.5	1.0
VISTAR-635	110	290	400	635	345	120	120	160	160	428	0.5	1.0
VISTAR-740	110	344	630	740								
VISTAR-880	110	580	1000	880								

ON REQUEST